



SPECIFICATIONS

Ultra Long Life Lithium-ion Cell

NMC18650-24EL

Features

- Ultra high lifetime capacity**
- High Specific Energy
- High Specific Power
- High Reliability
- High Safety
- Medical Class

Applications


- Medical Equipment
- Laptop Computer
- Digital Camcorder
- Walkie Talkie
- Tactical Survival Flashlight
- Material Tracking System
- Long Life Medium Power Energy Storage System

Specifications*

Nominal Capacity	Discharge at 25 °C at 25 °C, 0.5 A at 25 °C, 8.0 A	2.3 Ah (Minimum) 2.4 Ah (Typical) 2.3 Ah (Typical)
Lifetime Capacity	Watch chart below	3,660 Ah (Typical)**
Nominal Voltage	Discharge average	3.7 V
Charging	CC-CV, 4.2 V, 48 mA cut-off	0.5C (Standard) 1.0C (Rapid)
Discharging	2.75 V cut-off	8.0 A (Max. Cont.)
Battery Body Temperature	Charge Discharge Storage	0 ~ 45 °C -20 ~ 60 °C -20 ~ 45 °C
Weight	Average	44.0 g ± 5%


* All test data are averaging with 5 samples obtained from 3 month inventory.
**3,660 Ah capacity is typically delivered as an energy cell.

Dimensions

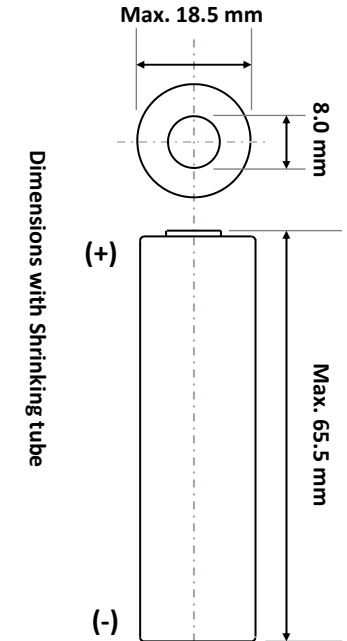


For reference only

Discharge Characteristics by Current

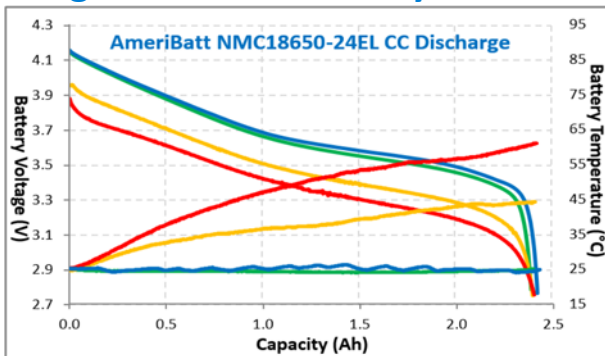


Charge: CC/CV, 0.5C/ 4.20 V 48 mA cut-off, Ta = 25 °C
Discharge: CC 0.5A/ 1A/ 5A/ 8A, 2.75 V cut-off, Ta = 25 °C

Cycle Life Characteristics

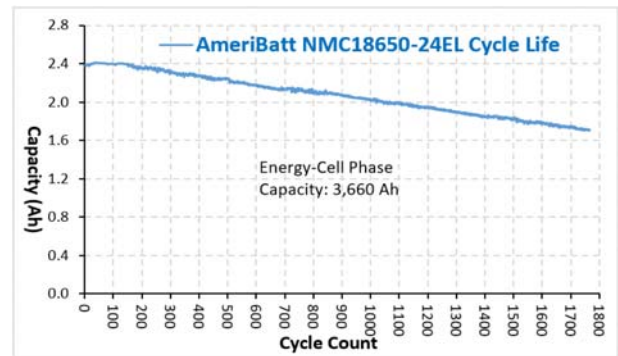


Charge: CC/CV, 0.5C/ 4.20 V 48 mA cut-off, Ta = 25 °C
Discharge: CC 1A, 2.75 V cut-off, Ta = 25 °C

Discharge Characteristics by Temperature

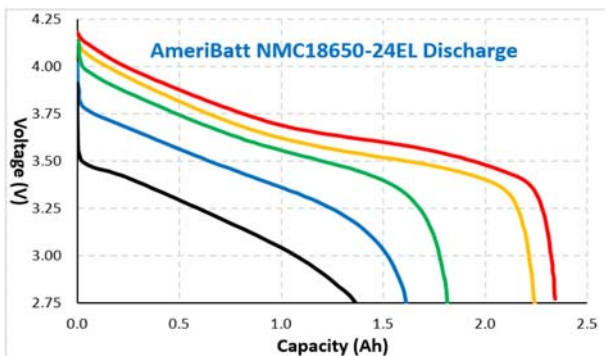

Charge: CC/CV, 0.5C/ 4.20 V 48 mA cut-off, Ta = 25 °C
Discharge: CC 1A, 2.75 V cut-off, Ta = +55, +25, 0, -10, -20 °C

Charge Characteristics

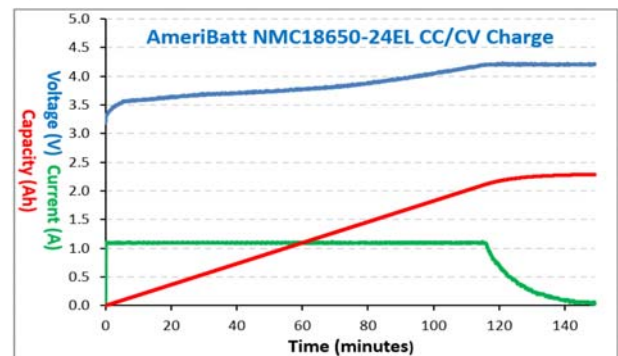

Charge: CC/CV, 0.5C/ 4.20 V 48 mA cut-off, Ta = 25 °C

The data in this document is for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

To seek more energy storage solutions from AmeriBatt, please email info@ameribatt.com, or visit www.ameribatt.com.